



Similar to the illustration

grid | power VR M

Series power.com SB

Valve regulated lead-acid batteries

Typical applications:

- Uninterruptible power supply (UPS)
- Telecommunications
 - Mobile phone stations
 - BTS-stations
 - Off-grid/on-grid solutions
- Power supply systems
- Emergency lighting

Your benefits:

- Maintenance-free regarding water refilling – due to innovative Gel-ESS technology
- Good high-current capability – low investment costs due to innovative electrode structure
- Optimal space utilization – due to horizontal arrangement
- Higher short-circuit safety even during the installation – based on HOPPECKE system connectors
- Easy assembly and installation – battery lid with integral handle*


Type overview **grid | power VR M**

Capacities, dimensions and weights

Series power.com SB	Type	$C_8/1.75\text{ V}@$ 25 °C / 77 °F Ah	$C_{10}/1.80\text{ V}@$ 20 °C / 68 °F Ah	Weight kg lbs	Length L mm inch	Width W mm inch	Height H mm inch	Fig.
grid power VR M 6-170	power.com SB 6V 170	166	161	31.8 70.1	242 9.53	170 6.69	275 10.83	A
grid power VR M 6-220	power.com SB 6V 220	210	220	39.6 87.3	308 12.13	170 6.69	275 10.83	A
grid power VR M 2-230	power.com SB 2V 230	241	232	14.5 32.0	90 3.54	183 7.20	310 12.20	B
grid power VR M 2-330	power.com SB 2V 330	357	343	20.9 46.1	183 7.20	129 5.08	310 12.20	C
grid power VR M 2-400	power.com SB 2V 400	425	411	25.2 55.6	183 7.20	155 6.10	310 12.20	D
grid power VR M 2-600	power.com SB 2V 600	623	604	38.0 83.8	183 7.20	226 8.90	310 12.20	E
grid power VR M 2-800	power.com SB 2V 800	859	834	50.3 110.9	182 7.17	304 11.97	310 12.20	F
grid power VR M 2-1000	power.com SB 2V 1000	1099	1070	64.5 142.2	182 7.17	391 15.39	310 12.20	G


C_{10} and C_8 = Capacity at 10 h and 8 h discharge

Fig. A




grid | power VR M 6-170 -
grid | power VR M 6-220

Fig. B




grid | power VR M 2-230

Fig. C




grid | power VR M 2-330

Fig. D




grid | power VR M 2-400

Fig. E




grid | power VR M 2-600

Fig. F

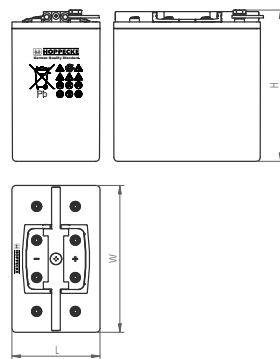

grid | power VR M 2-800

Fig. G

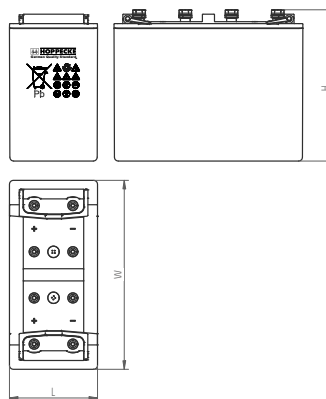

grid | power VR M 2-1000

Design life: up to 15 years · Eurobat classification: ≥ 12 years

Optimal environmental compatibility – closed loop for recovery of materials in an accredited recycling system

Head Office

HOPPECKE Batterien GmbH & Co. KG
P.O. Box 1140 · D-59914 Brilon · Germany
Bontkirchener Str. 1 · D - 59929 Brilon
Tel.: +49 (0) 2963 61-374 · Fax: +49 (0) 2963 61-270
E-Mail: info@hoppecke.com · www.hoppecke.com

Subsidiary

HOPPECKE Batteries Inc.
2 Berry Dr
Hainesport, NJ 08036 · USA
Tel.: +1 856-616-0032 · Fax: +1 856-616-0132
E-Mail: contact@hoppecke-us.com · www.hoppecke-us.com

